Grate Lockdowns

Anchor Lugs for #4 1/2" Rebar (by others)

2 1/2"(64)

For Commercial Applications

Job Name	Contractor
Job Location	Approval
Engineer	Contractor's P.O. No.
Approval	Representative

11/2"(38)

Dead Level® DX-GF

12" Wide Trench Frame & Grating


Specification

Watts Dead Level® DX-GF 12"(305) wide x 48"(1219) long (standard) ductile iron frame, and (specify) grating to suit DIN Class (specify) load rating. System to include frame connectors, grate lockdowns, and construction covers. Installation to be performed in accordance with manufacturer's installation instructions.

Suffix	Grate Options Description	Load Class
-DI -DI-ADA -GDI -RGP -RGS -RSP -RSS -SCI	Ductile Iron Ductile Iron ADA Galvanized Ductile Iron Reinforced Galvanized Perforated Reinforced Galvanized Stotted Reinforced Stainless Steel Perforated Reinforced Stainless Steel Slotted Solid Cast Iron	Class F Class F Class E Class E Class E Class E Class E Class E Class F Class Class Class F Class Class F Class Class F Class Class F

Suff	Options ix Description	
-FG	Galvanized Steel Frame Guard	
-FS	Stainless Steel Frame Guard	

Please refer to watts.com for BAA information on specific models.

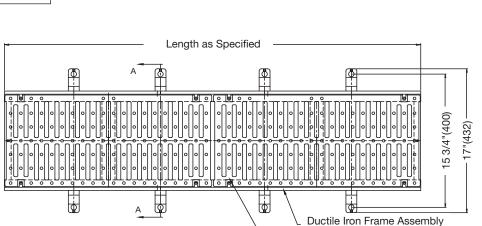

11 3/4"(298)

10 13/16"(274)

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



Grating as Specified (Ductile Iron Shown)

USA: T: (800) 338-2581 • F: (828) 248-3929 • Watts.com **Canada:** T: (888) 208-8927 • F: (888) 479-2887 • Watts.ca **Latin America:** T: (52) 55-4122-0138 • Watts.com