

Engineering Specification

Job Name _____ Contractor _____

Job Location _____ Approval _____

Engineer _____ Contractor's P.O. No. _____

Approval _____ Representative _____

Tag _____

WD-100-L-CSA CSA Certified Low Rough-In Grease Interceptor




Specification

Watts WD-100-L-CSA Certified recessed or floor mounted epoxy coated steel low-rough-in grease interceptor with gasketed epoxy coated steel skid-proof cover secured with hex head center bolt(s), removable baffle assembly, deep seal trap with cleanout, external cast iron flow control fitting, and no hub (standard) connections.

Flow Rate		
Suffix	Description	
-120	20 GPM (CSA Certified)	<input type="checkbox"/>
-135	35 GPM (CSA Certified)	<input type="checkbox"/>
-150	50 GPM (Complies w/CSA)	<input type="checkbox"/>

Optional Inlet/Outlet Sizes (When -0 is Selected)		
Suffix	Description	
-2	2"(51)	<input type="checkbox"/>
-3	3"(76)	<input type="checkbox"/>
-4	4"(102)	<input type="checkbox"/>

Options		
Suffix	Description	
-B	Removable Bucket	<input type="checkbox"/>
-DI	Dual Inlet	<input type="checkbox"/>
-E	Electronic	<input type="checkbox"/>
-F	Flange	<input type="checkbox"/>
-FC	Flange w/Membrane Clamp	<input type="checkbox"/>
-HDC	Heavy Duty Cover, 1,000 lbs.	<input type="checkbox"/>
-XHDC	Extra Heavy Duty Cover, 10,000 lbs.	<input type="checkbox"/>
-IP	Injection Port (specify location)	<input type="checkbox"/>
-0	Inlet & Outlet (other than standard)	<input type="checkbox"/>
-SS	Stainless Steel	<input type="checkbox"/>
-T	Threaded Connections	<input type="checkbox"/>

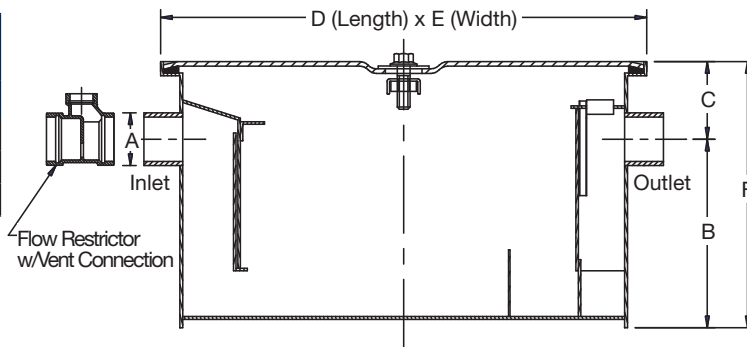

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

Cubic Capacity of Fixtures in Inches	Interceptor Catalog Number	Grease Capacity Lbs.	Flow Rate GPM	A Inlet & Outlet	B Base To Center	C Top to Center	D Length	E Width	F Height
up to 6150	WD-120C-L	40	20	3"(76)	8"(203)	4"(102)	35"(889)	23"(584)	12"(304)
6151 to 10750	WD-135C-L	70	35	4"(102)	8"(203)	4"(102)	41"(1041)	33"(838)	12"(304)
10751 to 15400	WD-150-L	100	50	4"(102)	8 1/2"(216)	5 1/2"(139)	55"(1397)	33"(838)	14"(356)

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



USA: T: (800) 338-2581 • F: (828) 248-3929 • Watts.com
Canada: T: (905) 332-4090 • F: (905) 332-7068 • Watts.ca
Latin America: T: (52) 55-4122-0138 • Watts.com